


SMALL TWO CHANNEL RECORDER

TEMPERATURE & DEPTH



The RBRduet³ T.D is RBR's accurate, small, and versatile dual channel temperature and depth recorder. The standard temperature and depth logger samples up to 2Hz, and optionally up to 32Hz. Tide and wave versions are available. The loggers are designed with large memory for extended deployments, and USB-C download for large data files.

FEATURES

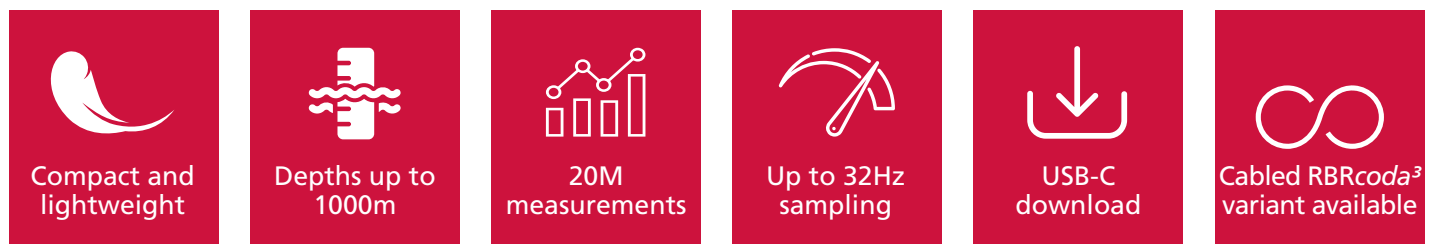

The RBRduet³ T.D recorder is available in the following configurations:

- ▶ RBRduet³ T.D temperature and depth, up to 2Hz continuous sampling
- ▶ RBRduet³ T.D|fast16 temperature and depth, up to 16Hz continuous sampling
- ▶ RBRduet³ T.D|fast32 temperature and depth, up to 32Hz continuous sampling

For information on RBR's tide and wave recorders, please refer to the RBRsolo³ / RBRduet³ datasheet.

The RBRduet³ T.D series has two channels: temperature and pressure. Its large data storage capacity is matched to high battery capacity to facilitate long deployments with higher sampling rates. Downloads are quick with USB-C. A dedicated desiccant holder makes it simple to replace desiccant before each deployment.

The calibration coefficients are stored with the logger and only one software tool, Ruskin, is required to operate the loggers. Datasets can be read directly in Matlab, or exported to Excel or ASCII files.

SMALL TWO CHANNEL RECORDER

TEMPERATURE, DEPTH, TIDES AND WAVES



Compact and lightweight



Depths up to 1000m



Over 20M measurements



Up to 32Hz sampling



USB-C download



Cabled RBRcoda³ variant available



RBR Ltd

95 Hines Road
Ottawa, Ontario
Canada K2K 2M5

+1 613 599 8900
info@rbr-global.com
rbr-global.com

Specifications

Physical

Power:	Any AA cell
Communication:	USB-C
Clock drift:	±60 seconds/year
Diameter:	25.4mm
Length:	265mm
Weight (air):	136g (OSP)
Weight (water):	<10g (OSP)

Temperature

Range:	-5°C to 35°C
Accuracy:	±0.002°C
Resolution:	<0.00005°C
Time Constant:	~1s (standard) or ~0.1s (fast16)
Typical stability:	0.002°C/year

Depth

Range (OSP):	20 / 50 / 200 / 500 / 1000m
Accuracy:	±0.05% full scale
Resolution:	<0.001% full scale
Time constant:	<10ms
Typical stability:	~0.1%/year

Sampling rates and Autonomy

RBRduet³ T.D

Sampling rate:	24hr to 1s, and 2Hz		
Autonomy:	Rate	Duration	# samples
	5s	4 years	25M
	2Hz	60 days	10M

RBRduet³ T.D | fast16

Sampling rate:	24hr to 1s, and 2Hz, 4, 8, and 16Hz		
Autonomy:	Rate	Duration	# samples
	16Hz	30 days	45M

RBRduet³ T.D | fast32

Sampling rate:	24hr to 1s, and 2Hz, 4, 8, 16, and 32Hz		
Autonomy:	Rate	Duration	# samples
	32Hz	16 days	45M

Realtime variant

Cabled realtime variant available as the RBRcoda³.

Deep variant

Explore up to 10km deep with the RBRduet³ T.D | deep.